


## Indoor Dog Sports Flooring (XT)

Indoor dog sports flooring is a continuous, abrasion-resistant surface for agility halls and training areas. It is installed loose, either as a single layer or as a sandwich system with functional tiles XX. The integrated jigsaw interlock connects the tiles securely and creates a virtually invisible hairline joint.


The wear layer made of EPDM rubber granules ensures a consistent surface, while the base layer of recycled ELT rubber granules provides impact absorption. The surface is slip-resistant, paw-friendly and thermally insulating. Its structure limits moisture penetration and supports easy cleaning with standard methods.

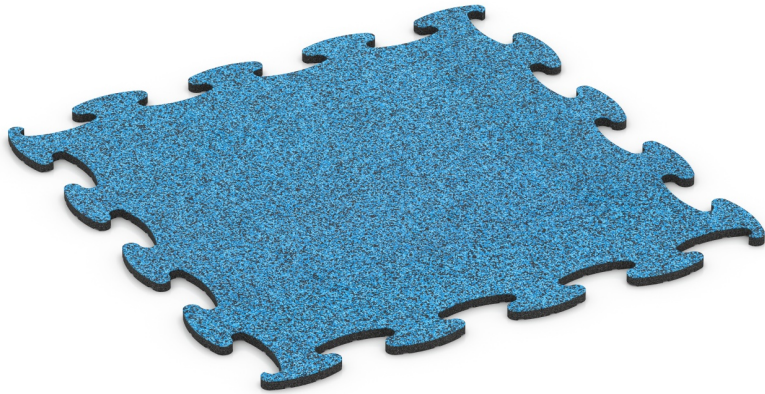

### Product data

Colour	<b>Atlantic</b>	Weight	<b>17.19 kg/piece = 17.9 kg/m<sup>2</sup></b>
Fixing system	<b>Optimised jigsaw interlock without bevel</b>	Conversion	<b>1 m<sup>2</sup> = 1.04 piece</b>
Dimensions	<b>1010 x 1010 x 18 mm</b>	Usable dimensions	<b>98 x 98 x 1,8 cm</b>

### Properties



#### Colour Atlantic

Products in Atlantic are manufactured using EPDM rubber granules in mixed blue and turquoise shades with a clear, UV-stabilised PU binder. The colour blend creates a fresh, vivid appearance with noticeable tonal variation. As EPDM is inherently UV-resistant and the pigments are fully integrated into the granules, the colour remains stable over time, including under UV exposure and abrasion.

#### Material

This product has a two-layer construction. The wear layer, approximately 2 mm thick, is made from newly manufactured, through-coloured and non-toxic EPDM granules (Ethylene Propylene Diene Monomer), bound with polyurethane. The wear layer has a closed surface. The base layer consists of cleaned, black recycled tyre rubber granules (ELT) of fine grain size, bound with polyurethane. The abbreviation ELT stands for "End of Life Tyres" – the granules originate from the recycling of used tyres. The base layer is pressed at high density.

## Characteristics



### Indoor and Sheltered Outdoor Areas

Suitable for indoor and sheltered outdoor areas. Avoid waterlogging and continuous moisture exposure.




### Cfl-s1

Reaction to fire according to EN 13501-1: Cfl-s1  
Limited contribution to fire. Low smoke production.



### Colourfast and UV-resistant

The surface made of EPDM rubber granules is colourfast and long-term UV-resistant (sun).



### Toxicologically safe

No impermissible pollutant emissions, initial rubber odour dissipates over time.

## Comparative values

Comparing technical data on a scale from 1 to 5 offers a practical way to objectively assess the relevant properties of WARCO products, making it easier to find the most suitable product for the intended application. Detailed information on the scale values and their calculation is available on the product detail page.

Compressive strength - Scale value 4 = approx. 0.25 mm residual dent after 24 hours of unloading (BS 7188)

Abrasion resistance - Resistance to abrasive wear - Scale value 3 = "very good" (BS 7188)

Thermal insulation - Scale value 2 = Thermal conductivity approx. 0.12 W/(m·K)

Slip resistance class DS (EN 14041) - Scale value 2 = Coefficient of friction approx. 0.38

Slip resistance (EN 16165) - Scale value 3 = mean acceptance angle approx. 15°, group R10

Water Permeability (EN 12616) - Rating 2 = Infiltration up to 10 mm/h (10 l/h/m<sup>2</sup>)

Apparent density - scale value 4 = 900 to 1000 kg/m<sup>3</sup>

Shock, vibration, and impact sound insulation - Scale value 1 = noticeable damping

**Michael Schladt**  
**WARCO Bodenbeläge**  
Andergasse 17  
67434 Neustadt an der  
Weinstraße

WARCO Gallery  
Klemmhof 9  
67433 Neustadt an der Weinstraße  
Terminvereinbarung erforderlich.

**Fachberatung**  
**06321 9152391**

E-Mail: [info@warco.eu](mailto:info@warco.eu)  
web: [www.warco.eu](http://www.warco.eu)