


Exhibition Click Floor Tile (XT)

The exhibition click floor tile is a modular surface covering for trade fairs, exhibitions and temporary event spaces. Installed loose without fixing, the tiles connect via a concealed jigsaw interlock and form a hairline joint that is barely visible across the surface.

The wear layer made of UV-stable EPDM rubber granulate ensures a consistent appearance, while the ELT base layer supports load distribution and impact absorption. The surface reduces fatigue for standing staff, accommodates exhibition equipment loads and withstands repeated assembly cycles. After each event, the tiles can be removed, cleaned and reused without residue.

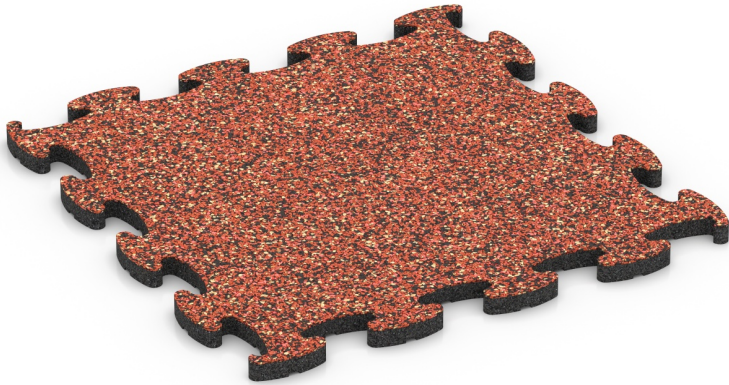

Product data

Colour	Embers	Weight	3.65 kg/piece = 18.34 kg/m²
Fixing system	Optimised jigsaw interlock without bevel	Conversion	1 m² = 5.03 piece
Dimensions	485 x 485 x 18 mm	Usable dimensions	44,6 x 44,6 x 1,8 cm

Properties



Colour Embers

Ember glow combines red, orange and brown tones in a bold, high-contrast surface with a vivid appearance.

Material

This product has a two-layer construction. The wear layer, approximately 2 mm thick, consists of newly produced, permanently coloured EPDM granules (Ethylene Propylene Diene Monomer) bound with UV-stabilised polyurethane. The wear layer has a closed surface. The base layer is made from cleaned black recycled tyre rubber granules (ELT) of fine grain size, bound with polyurethane. ELT stands for "End of Life Tyres" and refers to granules produced from recycled tyres. The base layer is manufactured with a high compaction level.

Characteristics



Indoor and Sheltered Outdoor Areas

Suitable for indoor and sheltered outdoor areas. Avoid waterlogging and continuous moisture exposure.



Cfl-s1

Reaction to fire according to EN 13501-1: Cfl-s1
Limited contribution to fire. Low smoke production.



Colourfast and UV-resistant

The surface made of EPDM rubber granules is colourfast and long-term UV-resistant (sun).



Toxicologically safe

No impermissible pollutant emissions, initial rubber odour dissipates over time.

Comparative values

Comparing technical data on a scale from 1 to 5 offers a practical way to objectively assess the relevant properties of WARCO products, making it easier to find the most suitable product for the intended application. Detailed information on the scale values and their calculation is available on the product detail page.

Compressive strength - Scale value 4 = approx. 0.25 mm residual dent after 24 hours of unloading (BS 7188)

Abrasion resistance - Resistance to abrasive wear - Scale value 3 = "very good" (BS 7188)

Thermal insulation - Scale value 2 = Thermal conductivity approx. 0.12 W/(m·K)

Slip resistance class DS (EN 14041) - Scale value 2 = Coefficient of friction approx. 0.38

Slip resistance (EN 16165) - Scale value 3 = mean acceptance angle approx. 15°, group R10

Water Permeability (EN 12616) - Rating 2 = Infiltration up to 10 mm/h (10 l/h/m²)

Apparent density - scale value 4 = 900 to 1000 kg/m³

Shock, vibration, and impact sound insulation - Scale value 1 = noticeable damping

Michael Schladt
WARCO Bodenbeläge
Andergasse 17
67434 Neustadt an der
Weinstraße

WARCO Gallery
Klemmhof 9
67433 Neustadt an der Weinstraße
Terminvereinbarung erforderlich.

Fachberatung
06321 9152391

E-Mail: info@warco.eu
web: www.warco.eu